IW-R400 Chassis Quick Reference

Major Components

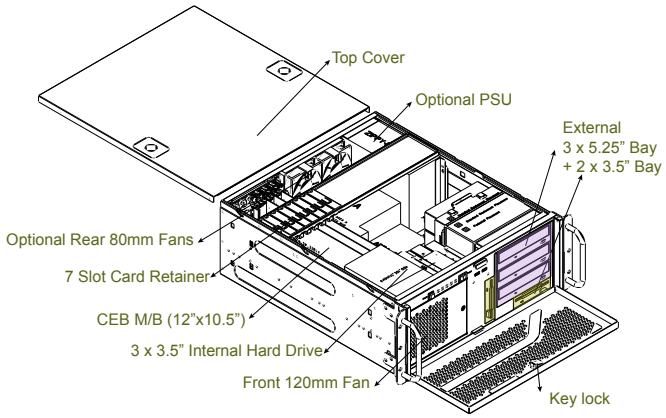

External 5.25" HDD Cage Assembly

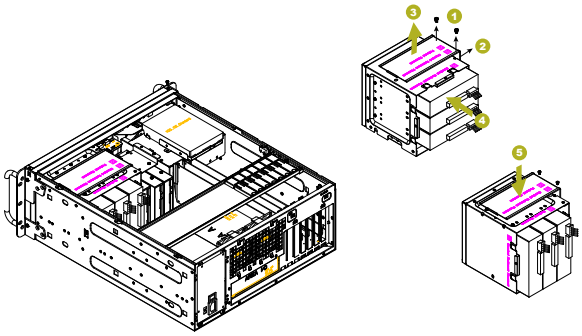

1. Release two screws to remove the 5.25" cage set out of the chassis
2. Release two screws of the holding plate
3. Remove the holding plate
4. Rotate the 5.25" device cage set
5. Put down the holding plate
6. Attach back with all the screws

Front Panel Controls and Indicators

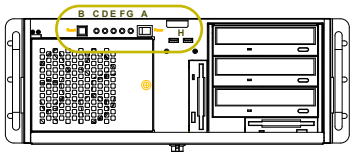

A: Power ON Switch
B: System Reset Button
C: Power LED
D: HDD LED
E: LAN1 LED
F: LAN2 LED
G: Alarm LED
H: 2 x USB 2.0 Port

Fan Module Assembly

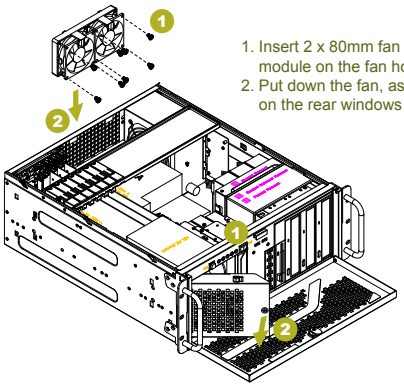

1. Insert 2 x 80mm fan into the module on the fan holder
2. Put down the fan, assemble on the rear windows till lock

1. Release one thumb screws
2. Pull out the front fan assembly kit and disconnect the fan power for fan connector

Rear Windows Configuration

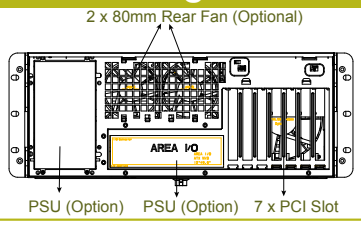

Pedestal Foot-stand Installation

1. Release six screws of rack ear on each side
2. Put the foot stand on the chassis left use the four hooks into specified mounting holes
3. Slide it toward until you hear a crack sound

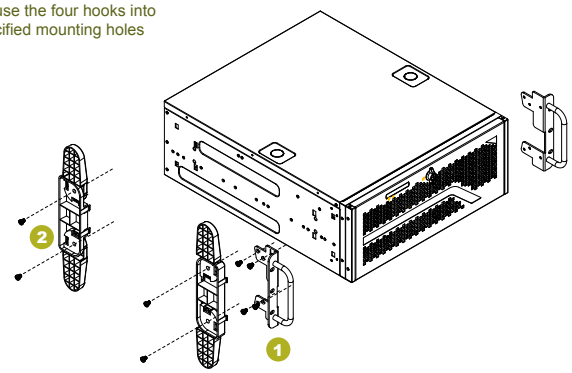

Top Cover Opening

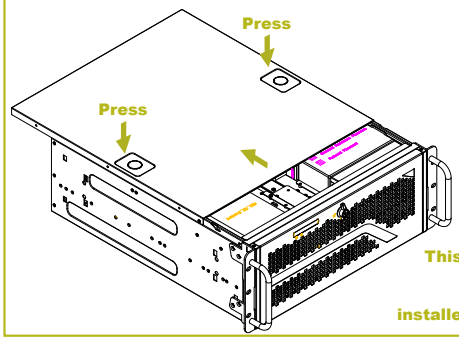

CAUTION

This unit must be operated with the chassis TOP COVER installed to ensure proper cooling

Installing Hard Drive

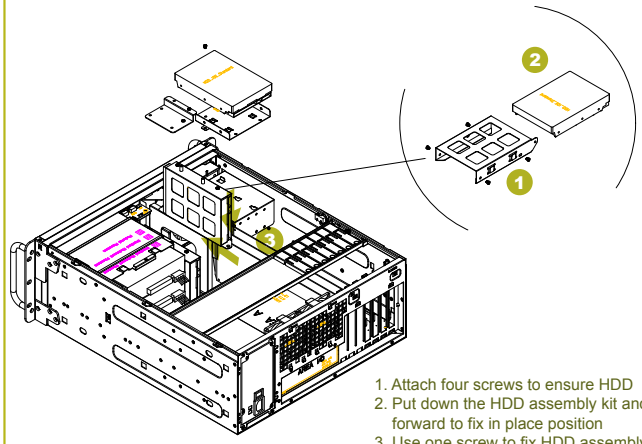

1. Attach four screws to ensure HDD
2. Put down the HDD assembly kit and move forward to fix in place position
3. Use one screw to fix HDD assembly set

Pedestal Top Cover Installation

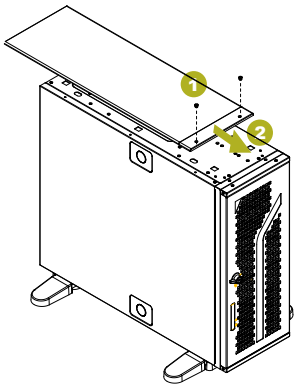

1. Put the top plastic cover snaps on the top chassis
2. Push toward to let the positions pins into holes totally until you hear a crack sound